



Flex-A-Seal™ Secondary Seal

HMT Rubbaglas' **Flex-A-Seal** Secondary Seal System is one of the most economical and effective Secondary Seals available. Easily installed and maintained, the **Flex-A-Seal** has received approval from Governmental regulatory agencies throughout the world for its ability to meet or exceed stringent gap requirements for Secondary Seals.

Designed to be installed with the tank In-Service, the **Flex-A-Seal** is engineered to adapt to virtually every type of floating roof design, accommodating wide variations in annular space and compatible with various types of primary seals and rim connections. Each **Flex-A-Seal** is custom designed to fit a specific tank's characteristics. This assures that each seal will maintain a tight fit against the tank shell all around the circumference of the floating roof and at all operating roof elevation levels.


The **Flex-A-Seal**, with its wide range of vapour barrier fabrics, combined with a TPE or PVC-Nitrile wiper tip, assures a highly effective seal for a wide range of products and service conditions. Available in either Galvanised or Stainless Steel, the **Flex-A-Seal** combine economy with durability.

HMT has been designing, fabricating and installing seals on Aboveground Storage Tank floating roofs for many years. The **Flex-A-Seal** has "field-proven" its effective sealing capability and long service life, while offering an economical choice in Secondary Seals.



Advanced Design:

- Long Service Life
- Maintenance Free Operation
- In-Service Installation
- Exceeds Government Requirements
- Ease of Installation
- Quality Materials
- Exceptional Gap Sealing Ability
- Accommodate Wide Rim Space Variations

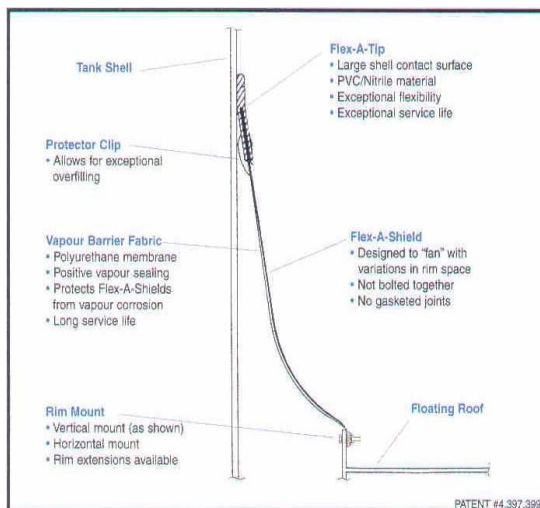

Design Features:

- In-Service Installation
- Accommodate Wide Range of Rim Space Variations
- Wide Range of Materials for Various Service Conditions
- Design Significantly Reduces Vapour Emissions and Product Contamination
- Static Electricity Dissipation
- Superior Fire Snuffing Ability
- Rim Mounts for Vertical or Horizontal Attachment
- PTFE (Teflon®) Vapour Barrier Fabric (optional)
- Foam-Port Openings (optional)
- In its "Double" Configuration, the Flex-A-Seal can be Fitted as a Combined Primary & Secondary Seal System

Exclusive Representatives for India & Sri Lanka:
SB TankServe Pvt. Ltd.
112A/3 Prabhat Road, Tel: 91 20 3090 2340
14th Cross Lane, Fax: 91 20 2545 1852
Pune 411004 (India) Email: sales@sbtankserve.com