



Secondary Seal Master


The **SealMaster Secondary Seal** for Aboveground Storage Tanks floating roofs is specifically designed to enable tank owners to maximise the operation of their tankage. This is particularly so when used in conjunction with the SealMaster primary seal. The **SealMaster Secondary Seal** meets a design specification of $-X \pm 3 X$ mm resulting in sealing of out of round tanks. The secondary seal has been designed to remain in full contact with the tank shell at all times reducing emissions and possible rim fires.

Incorporating a low profile design, the **SealMaster** increases the capacity of a floating roof tank, thus increasing the operating efficiency and allowing tank owners to maintain competitiveness and profitability. The superior qualities of the seal materials result in a maintenance free long-lasting seal.

The **SealMaster Sealing System** has been tested to fire retardancy test DIN 22118 and passed to the requirements of DIN 22100.



Secondary SealMaster from above deck

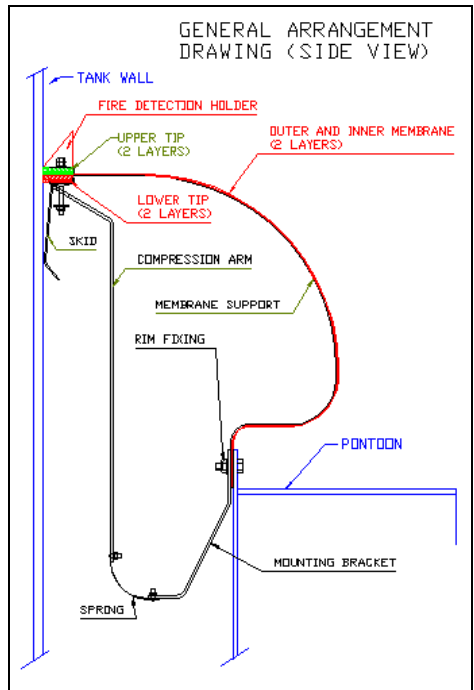

SEAL MATERIALS:

Metallic:

- Compression bars - 4 mm galvanised steel
- Springs - Fully Hardened Stainless Steel

Secondary Vapour Barrier Fabric:

- PTFE (Teflon®)
- UV / ozone and tear resistant

ADVANCED DESIGN

- Compatibility with all Stored Products
- Maintenance Free Operation
- Quality Materials
- Exceptional Gap Sealing Ability
- Accommodates Wide Rim Space Variations
- DIN 22118 tested

