




VaporFlex™ Secondary Seal

The HMT VaporFlex Secondary Seal is the first internal secondary seal to combine flexibility, low profile, light weight, abrasion resistance, 100% MTBE compatible materials and fifteen plus years life cycle into a competitively priced secondary seal

The VaporFlex Secondary Seal, for internal floating roofs, was developed specifically to resist the many products and additives normally stored in floating roof tanks. Its Petroflex™ (PTFE) wiper / vapour barrier fabric construction makes the VaporFlex Secondary Seal resistant to all stored products including benzene, methanol, toluene, naphtha, ETBE, TAME and MTBE.

The VaporFlex Secondary Seal has unsurpassed gap-sealing ability combined with the longest service life of any secondary seal for internal floating roofs. Engineered for rapid field installation, the VaporFlex Secondary Seal can be installed on both aluminium and steel roofs.

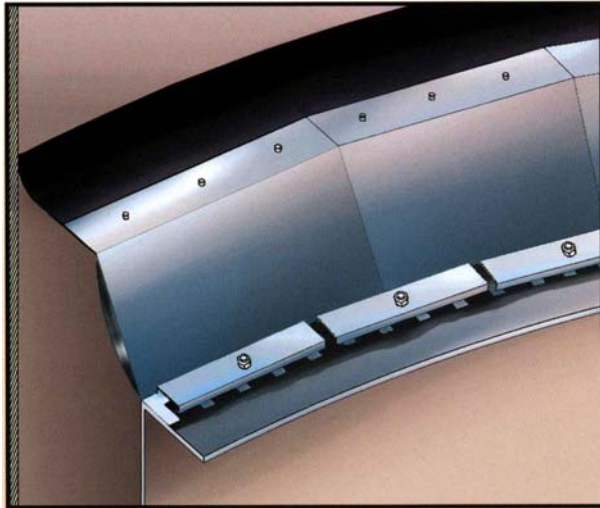


Design Features

- Resistant to all products normally stored in floating roof tanks
- Longest service life of any secondary seal for internal floating roofs
- Petroflex™ PTFE (Teflon®) wiper / vapour barrier fabric construction
- Stainless steel metal parts
- Excellent gap-sealing ability
- Rapid installation with both aluminium and steel internal floating roofs
- Low profile / light-weight
- Abrasion resistant

The VaporFlex Components are manufactured from the following Materials:

- Support Plates: Hardened Stainless Steel
- Seal Vapour Fabric: PTFE (Teflon)
- Wiper wrapped with 25mil Teflon
- Clamping Hardware: Stainless Steel
- Bolting Hardware: Stainless Steel

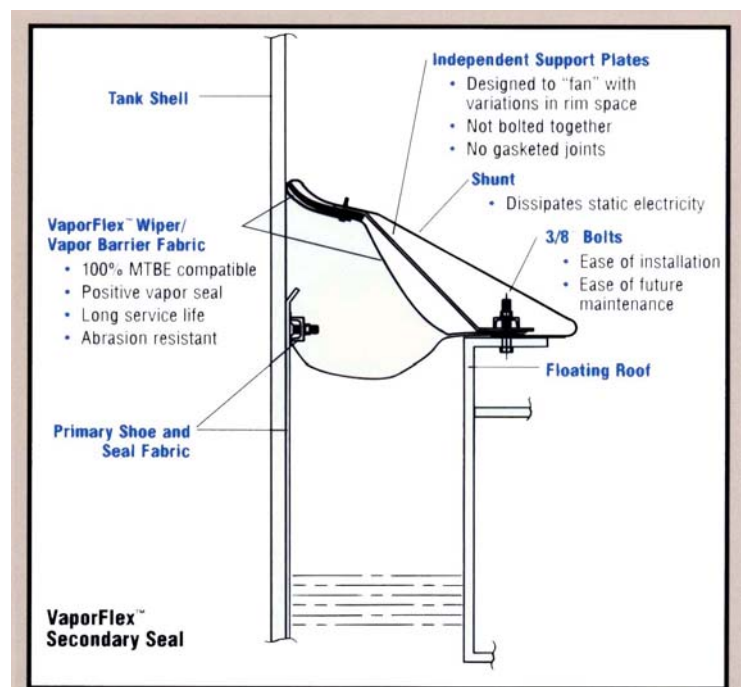

Exclusive Representatives for India & Sri Lanka:

SB TankServe Pvt. Ltd.

112A/3 Prabhat Road, Tel: 91 20 3090 2340

14th Cross Lane, Fax: 91 20 2545 1852

Pune 411004 (India) Email: sales@sbtankserve.com